

***Manufacturer of Trimix &
Fly Ash Brick Machinery.***

***Supplier of TMT Bar Cutting
& Bending Machine***

Trimix Contractor

Shree Sadguru Enterprise

Mr. Hemant Panchal Cell: 09510104639

Mr. Pragnesh Panchal Cell: 09898537974

Address: 15, Shiv Shakti Estate, Sanjay Chowk,
Near Nagarwel Hanuman Temple, Amraiwadi,
Ahmedabad 380026 (Gujarat) India.

Email: trimix.sadguruenterprise@gmail.com

Web: <http://www.trimixmachinery.com/>

2 HP Power Trowel cum Floater



Specification:

1. Dish Diameter: 1 meter
2. Net Weight: 95 Kg (Without Dish)
3. Handle Length: 65 Inch (Folding) Advantage: Easier mobilization/Handling.
4. 3 Phase/2 HP & 3HP Dual speed Electric Motor Advantage: It has dual speed so operator can operate as per requirement.
5. Spring coupling Advantage: Machine could't rotate counter clock wise so it will protect the machine & man from major accident.

Spares:

1. 3 mm Thk Dish = 1 pcs.
2. Machine Stand = 1 pcs.
3. Spring = 2 pcs.

Concrete Groove Cutter

Specification:

1. 7.5 H.P/10 H.P Motor (Optional in Kirlosker or Crompton make).
2. Cutter Dia.: 14 inch to 18 inch
3. Cutter Depth: Upto 4 inch
4. In built mounted water Tank.



De-Watering Vacuum Systems



Specification:

1. 5 H.P / 7.5 H.P Foot mounted Pump.
2. Optional in Kirlosker & Crompton make motor.

Spares:

1. 13.5 x 10 feet Top met with suction assembly
2. 11.5 x 6.5 feet bottom met (Including of filter cloth) &
3. 5 mtr long Green Hose pipe


Safety Electric Panel Board

Specification:

1. 3 Phase LED indicator.
2. Amp. & Volt. Meter.
3. ELCB, MCB with 3 pole skt.
4. Safe & Secure.
5. Full Safety for man & machine.



Screed Vibrator

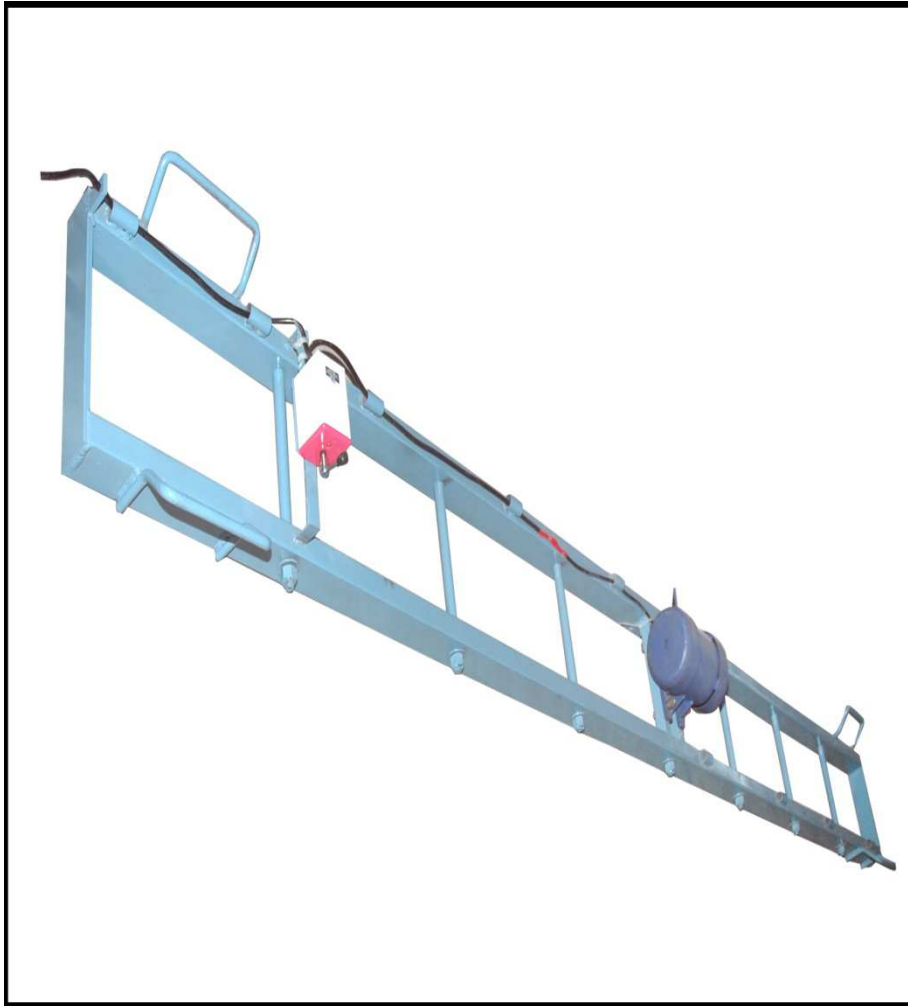

Specification:

1. 1 H.P Foot mounted vibrator motor.
2. Specially Design for better strength & easy to clean.
3. Also available in adjustable segment. It means you can use one vibrator in two various width.